

M4i.44xx-x8 - 14/16 bit Digitizer up to 500 MS/s

- Up to 500 MS/s on four channels
- Up to 8 synchronous Digital Inputs (Option)
- Ultra Fast PCI Express x8 Gen 2 interface
- Separate dedicated ADC and amplifier per channel
- 6 input ranges: ± 200 mV up to ± 10 V
- 2 GiSample (4 GiByte) on-board memory
- Window, re-arm, OR/AND trigger
- Synchronization of up to 8 cards per system
- Features: Single-Shot, Streaming, Multiple Recording, Gated Sampling, ABA, Timestamps and optional Average and Statistics
- Boxcar Average (high-resolution) mode to increase resolution
- Direct data transfer to CUDA GPU using SCAPP option


Speed	SNR	ENOB
130 MS/s	up to 72.0 dB	up to 11.6 LSB
250 MS/s	up to 71.6 dB	up to 11.6 LSB
500 MS/s	up to 68.0 dB	up to 11.0 LSB

FPGA Options:

- Block Average up to 128Ki
- Block Statistics/Peak Detect

SCAPP
 Spectrum's CUDA Access – Parallel Processing

M4i
 series

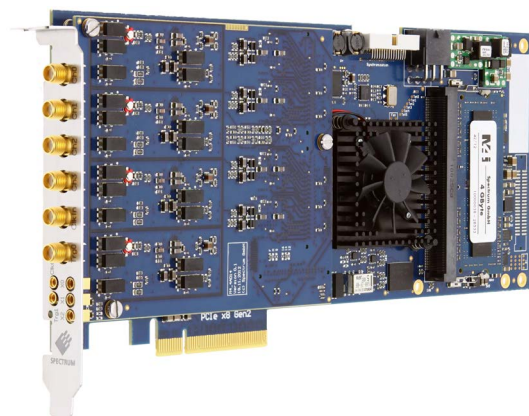

- PCIe x8 Gen 2 Interface
- Works with x8/x16 PCIe slots
- Sustained streaming mode more than 3.4 GB/s**

Operating Systems	Programming Languages	Supported Software
• Windows 7 (SP1), 8, 10, 11 Server 2008 R2 and newer • Linux Kernel 5.x, 6.x, 7.x • Windows/Linux 32 and 64 bit	• C, C++, C#, Python • Julia, Java, VB.NET, Delphi • IVI	• SBench 6 • MATLAB • LabVIEW

Model	Resolution	1 channel	2 channels	4 channels
M4i.4451-x8	14 Bit	500 MS/s	500 MS/s	500 MS/s
M4i.4450-x8	14 Bit	500 MS/s	500 MS/s	
M4i.4421-x8	16 Bit	250 MS/s	250 MS/s	250 MS/s
M4i.4420-x8	16 Bit	250 MS/s	250 MS/s	

Export-Versions

Sampling rate limited versions that do not fall under export restrictions.

Model		1 channel	2 channels	4 channels
M4i.4481-x8	14 Bit	400 MS/s	400 MS/s	400 MS/s
M4i.4480-x8	14 Bit	400 MS/s	400 MS/s	
M4i.4471-x8	16 Bit	180 MS/s	180 MS/s	180 MS/s
M4i.4470-x8	16 Bit	180 MS/s	180 MS/s	

General Information

The M4i.44xx-x8 series digitizers deliver the highest performance in both speed and resolution. The series includes PCIe cards with either two or four synchronous channels where each channel has its own dedicated ADC. The ADC's can sample at rates from 130 MS/s up to 500 MS/s and are available with either 14 bit or 16 bit resolution. The combination of high sampling rate and resolution makes these digitizers the top-of-the-range for applications that require high quality signal acquisition.

The digitizers feature a PCI Express x8 Gen 2 interface that offers outstanding data streaming performance. The interface and Spectrum's optimized drivers enable data transfer rates in excess of 3.4 GB/s** so that signals can be acquired, stored and analyzed at the fastest speeds.

While the cards have been designed using the latest technology they are still software compatible with the drivers from earlier Spectrum digitizers. So, existing customers can use the same software they developed for a 10 year old 200 kS/s multi-channel card and for an M4i series 500 MS/s high resolution digitizer!

**Throughput measured with a motherboard chipset supporting a TLP size of 256 bytes.

Software Support

Windows drivers


The cards are delivered with drivers for Windows 7, Windows 8, Windows 10 and Windows 11 (32 bit and 64 bit). Programming examples for Visual C++, C++ Builder, Delphi, Visual Basic, VB.NET, C#, Julia, Python, Java and IVI are included.

Linux Drivers



All cards are delivered with full Linux support. Pre-compiled kernel modules are included for the most common distributions like Fedora, Suse, Ubuntu LTS or Debian. The Linux support includes SMP systems, 32 bit and 64 bit systems, versatile programming examples for GNU C++, Python and Julia, as well as the possibility to get the kernel driver sources for your own compilation.

SBench 6




A base license of SBench 6, the easy-to-use graphical operating software for Spectrum cards, is included in the delivery. The base license makes it possible to test the card, display acquired data and make some basic measurements. It's a valuable tool for checking the card's performance and assisting with the unit's initial

setup. The cards also come with a demo license for the SBench 6 professional version. This license gives the user the opportunity to test the additional features of the professional version with their hardware. The professional version contains several advanced measurement functions, such as FFTs and X/Y display, import and export utilities as well as support for all acquisition modes including data streaming. Data streaming allows the cards to continuously acquire data and transfer it directly to the PC RAM or hard disk. SBench 6 has been optimized to handle data files of several GBytes. SBench 6 runs under Windows as well as Linux (KDE, GNOME and Unity) operating systems. A test version of SBench 6 can be downloaded directly over the internet and can run the professional version in a simulation mode without any hardware installed. Existing customers can also request a demo license for the professional version from Spectrum. More details on SBench 6 can be found in the SBench 6 data sheet.

Third-party products

Spectrum supports the most popular third-party software products such as LabVIEW or MATLAB. All drivers come with detailed documentation and working examples are included in the delivery.

SCAPP – CUDA GPU based data processing

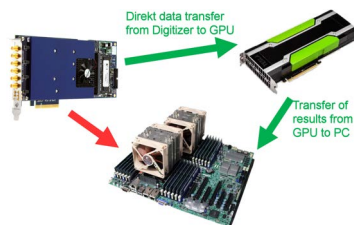

For applications requiring high performance signal and data processing Spectrum offers SCAPP (Spectrum's CUDA Access for Parallel Processing). The SCAPP SDK allows a direct link between Spectrum digitizers, AWGs (AWG mode only, not usable for DDS mode) or Digital Data Acquisition Cards and CUDA based GPU cards. Once in the GPU users can harness the processing power of the GPU's multiple (up to 10000) processing cores and large (up to 48 GB) memories. SCAPP uses an RDMA (Linux only) process to send data at the full PCIe transfer speed to and from the GPU card. The SDK includes a set of examples for interaction between the Spectrum card and the GPU card and another set of CUDA parallel processing examples with easy building blocks for

basic functions like filtering, averaging, data de-multiplexing, data conversion or FFT. All the software is based on C/C++ and can easily be implemented, expanded and modified with normal programming skills.

basic functions like filtering, averaging, data de-multiplexing, data conversion or FFT. All the software is based on C/C++ and can easily be implemented, expanded and modified with normal programming skills.

Hardware features and options

PCI Express x8



The M4i series cards use a PCI Express x8 Gen2 connection. They can be used in PCI Express x8 and x16 slots with Gen1, Gen2, Gen3, Gen4 or Gen5. The maximum sustained data transfer rate is more than 3.3 GByte/s (read direction) or 2.8 GByte/s (write direction) per slot. Server motherboards often recognize PCI Express x1, x2 or x4 connections in x8 or x16 slots. These slots can also be used with the M4i series cards but with reduced data transfer rates.


Connections

The cards are equipped with SMA connectors for the analog signals as well as for the external trigger and clock input. In addition, there are five MMCX connectors that are used for an additional trigger input, a clock output and three multi-function I/O connectors. These multi-function connectors can be individually programmed to perform different functions:



- Trigger output
- Status output (armed, triggered, ready, ...)
- Synchronous digital lines, being stored inside the analog data samples (Digitizer and AWG)
- Asynchronous I/O lines

Input Amplifier



The analog inputs can be adapted to real world signals using a wide variety of settings that are individual for each channel. By using software commands one can select a matching input

range and the signal offset can be compensated by programmable AC coupling or offset shifting.

Software selectable input path

For each of the analog channels the user has the choice between two analog input paths. The „Buffered“ path offers the highest flexibility when it comes to input ranges and termination. A software programmable 50 Ohm and 1 MOhm termination also allows to connect standard oscilloscope probes to the card. The „50 Ohm“ path on the other hand provides the highest bandwidth and the best signal integrity with a fewer number of input ranges and a fixed 50 Ohm termination.

Software selectable lowpass filter

Each analog channel contains a software selectable low-pass filter to limit the input bandwidth. Reducing the analog input bandwidth results in a lower total noise and can be useful especially with low voltage input signals.


Calibration on-board/factory/ISO/IEC 17025

All of the channels are calibrated in factory before the board is shipped. To compensate for different variations like PC power supply, temperature and aging, the software driver provides routines for an automatic on-board offset and gain calibration of all input ranges. All the cards contain a high precision on-board calibration reference.

Depending on the QM needs the card can shipped to factory for a complete re-calibration against external traceable calibration


sources. As an option a ISO/IEC 17025-compliant certificate is available with new cards and after recalibration.

Digital inputs



This option acquires additional synchronous digital channels phase-stable with the analog data. As standard a maximum of 3 additional digital inputs are available on the front plate of the card using the multi-purpose I/O lines. An additional option offers 8 more digital channels.

Ring buffer mode



The ring buffer mode is the standard mode of all oscilloscope instruments. Digitized data is continuously written into a ring memory until a

trigger event is detected. After the trigger, post-trigger samples are recorded and pre-trigger samples can also be stored. The number of pre-trigger samples available simply equals the total ring memory size minus the number of post trigger samples.

FIFO mode

The FIFO or streaming mode is designed for continuous data transfer between the digitizer card and the PC memory. When mounted in a PCI Express x8 Gen2 interface read streaming speeds of up to 3.4 GByte/s are possible. The control of the data stream is done automatically by the driver on interrupt request basis. The complete installed onboard memory is used to buffer the data, making the continuous streaming process extremely reliable.


Channel trigger

The digitizers offer a wide variety of trigger modes. These include a standard triggering mode based on a signals level and slope, like that found in most oscilloscopes. It is also possible to define a window mode, with two trigger levels, that enables triggering when signals enter or exit the window. Each input has its own trigger circuit which can be used to setup conditional triggers based on logical AND/OR patterns. All trigger modes can be combined with a re-arming mode for accurate trigger recognition even on noisy signals.

External trigger input

All boards can be triggered using up to two external analog or digital signals. One external trigger input has two analog comparators that can define an edge or window trigger, a hysteresis trigger or a rearm trigger. The other input has one comparator that can be used for standard edge and level triggers.


Multiple Recording



The Multiple Recording mode allows the recording of several trigger events with an extremely short re-arming time. The hardware doesn't need to be restarted in between.

The on-board memory is divided in several segments of the same size. Each of them is filled with data if a trigger event occurs. Pre- and posttrigger of the segments can be programmed. The number of acquired segments is only limited by the used memory and is unlimited when using FIFO mode.


Gated Sampling



The Gated Sampling mode allows data recording controlled by an external gate signal. Data is only recorded if the gate signal has a programmed level. In addition a pre-area before start

of the gate signal as well as a post area after end of the gate signal can be acquired. The number of gate segments is only limited by the used memory and is unlimited when using FIFO mode.


ABA mode

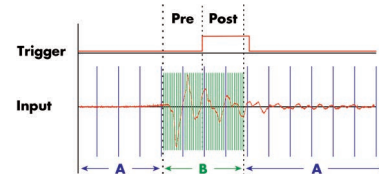

The ABA mode combines slow continuous data recording with fast acquisition on trigger events. The ABA mode works like a slow data logger combined with a fast digitizer. The exact

position of the trigger events is stored as timestamps in an extra memory.

Boxcar Average (high-resolution) mode




The Boxcar average or high-resolution mode is a form of averaging. The ADC oversamples the signal and averages neighboring points together. This mode uses a real-time boxcar averaging algorithm that helps reducing random noise. It also can

yield a higher number of bits of resolution depending on the signal acquired. The averaging factor can be set in the region of 2 to 256. Averaged samples are stored as 32 bit values and can be processed by any software. The trigger detection is still running with full sampling speed allowing a very precise relation between acquired signal and the trigger.

8 bit Sample reduction (low-resolution) mode

The cards and digitizerNETBOXes of the 44xx series allow to optionally reduce the resolution of the A/D samples from their native 14 bit or 16 bit down to 8 bit resolution, such that each sample will only occupy one byte in memory instead of the standard two bytes required. This does not only enhance the size of the on-board memory from 2 GiSamples to effectively 4 GiSamples, but also reduces the required bandwidth over the PCIe bus and also to the storage devices, such as SSD or HDD.


Timestamp



The timestamp function writes the time positions of the trigger events in an extra memory. The timestamps are relative to the start of recording, a defined zero time, externally

synchronized to a radio clock, an IRIG-B or a GPS receiver. Using the external synchronization gives a precise time relation for acquisitions of systems on different locations.

Firmware Option Block Average




The Block Average Module improves the fidelity of noisy repetitive signals. Multiple repetitive acquisitions with very small dead-time are accumulated and averaged. Random noise is reduced by the averaging process improving

the visibility of the repetitive signal. The complete averaging process is done inside the FPGA of the digitizer generating no CPU load at all. The amount of data is greatly decreased as well as the needed transfer bandwidth is heavily reduced.

Please see separate data sheet for details on the firmware option.

Firmware Option Block Statistics (Peak Detect)



The Block Statistics and Peak Detect Module implements a widely used data analysis and reduction technology in hardware. Each block is scanned for minimum and maximum peak and a summary including minimum, maximum, average, timestamps and position information is stored in memory. The complete averaging process is done inside the FPGA of the digitizer generating no CPU load at all. The amount of data is greatly decreased as well as the needed transfer bandwidth is heavily reduced.


age, timestamps and position information is stored in memory. The complete averaging process is done inside the FPGA of the digitizer generating no CPU load at all. The amount of data is greatly decreased as well as the needed transfer bandwidth is heavily reduced.

Please see separate data sheet for details on the firmware option.

External clock input and output

Using a dedicated connector a sampling clock can be fed in from an external system. Additionally it's also possible to output the internally used sampling clock on a separate connector to synchronize external equipment to this clock.

Reference clock



The option to use a precise external reference clock (normally 10 MHz) is necessary to synchronize the instrument for high-quality

measurements with external equipment (like a signal source). It's also possible to enhance the quality of the sampling clock in this way. The driver automatically generates the requested sampling clock from the fed in reference clock.

Star-Hub



The Star-Hub is an additional module allowing the phase stable synchronization of up to 8 boards of a kind in one system. Independent of the number of boards there is no phase delay between all channels. The Star-Hub distributes trigger and clock information between all boards to ensure all connected boards are running with the same clock and trigger. All trigger

sources can be combined with a logical OR allowing all channels of all cards to be the trigger source at the same time.

Multi-Purpose I/O 3 Standard + 8 Option



As standard each M4i.44xx card has 3 multi-purpose I/O lines. As an option a piggy-back module carries additional 8 multi-purpose input lines making up to 8 digital inputs and 3 digital inputs/outputs. This option is available with the same SMA connectors, as are used by the analog channels and trigger and clock input.

The I/O lines can be used for up to 8 synchronous digital data acquisition channels and additionally for asynchronous digital I/O, and can also carry out additional status information.


External Amplifiers



For the acquisition of extremely small voltage levels with a high bandwidth a series of external amplifiers is available. Each of the one channel amplifiers is working with a fixed input impedance and allows - depending on the bandwidth - to select different amplification levels between x10 (20 dB) up to x1000 (60 dB). Us-

ing the external amplifiers of the SPA series voltage levels in the μV and mV area can be acquired.

Firmware Option Digital Pulse Generator



The digital pulse generator option adds 4 internal independent digital pulse generators with programmable duty cycle, output frequency, delay and number of loops.

These digital pulse generators can be triggered by software, hardware trigger or can trigger each other allowing to form complex pulse schemes to drive external equipment or experiments. The digital pulse generators can be output on the existing multi-XIO lines (X0, X1, ...) or can be used to trigger other pulse generators internally. Time resolution of the pulse generator depends on the cards type and the selected sampling rate and can be found in the technical data section.

The pulse generator option is a firmware option and can be later installed on all shipped cards.

Export Versions

Special export versions of the products are available that do not fall under export control. Products fall under export control if their specification exceeds certain sampling rates at a given A/D resolution and if the product is shipped into a country where no general export authorization is in place.

The export versions of the products have a sampling rate limitation matching the export control list. An upgrade to the faster version is not possible. The sampling rate limitation is in place for both internal and external clock.

Technical Data

Definitions

Specifications (spec)

Figures are valid for products stored for at least 2 hours inside the specified operating temperature range, after a 30 minute warm-up, after running an on-board calibration and with properly cooled products. Data published in this document are specifications (spec) only where specifically indicated. Figures marked with (spec) are calibrated to the specification during production and during factory calibrations.

Typical (typ)

Figures marked with (typ) are a characteristic performance that most of the manufactured instruments will meet due to design. Typical figures are measured during production but cannot be calibrated.

Measured (meas)

A figure measured during development to communicate expected performance. The figure is measured in lab environment with an environmental temperature between 20°C and 25°C and an altitude of less than 100 m.

Nominal (nom)

The value of this figure is determined by design and is not measured nor calibrated.

Analog Inputs

Resolution (nom)	130 MS/s up to 250 MS/s 400 MS/s and 500 MS/s	16 bit (441, 442, 447, 822, 827) 14 bit (445, 448, 825, 828)	
Input Type		Single-ended	
ADC Differential non linearity (nom)	DNL, ADC only	±0.5 LSB (14 Bit ADC), ±0.4 LSB (16 Bit ADC)	
ADC Integral non linearity (nom)	INL, ADC only	±2.5 LSB (14 Bit ADC), ±10.0 LSB (16 Bit ADC)	
ADC Word Error Rate, WER (nom)	max. sampling rate	10 ⁻¹²	
Channel selection	software programmable	1, 2, or 4 (maximum is model dependent)	
Bandwidth filter (meas)	activate by software	20 MHz bandwidth with 3rd order Butterworth filtering	
Input Path Types	software programmable	50 Ω (HF) Path	Buffered (high impedance) Path
Analog Input impedance (nom)	software programmable	50 Ω	1 MΩ 25 pF or 50 Ω
Input Ranges (nom)	software programmable	±500 mV, ±1 V, ±2.5 V, ±5 V	±200 mV, ±500 mV, ±1 V, ±2 V, ±5 V, ±10 V
Programmable Input Offset (nom)	Frontend HW-Version < V9	not available	not available
Programmable Input Offset (nom)	Frontend HW-Version ≥ V9	–100%..0% on all ranges	–100%..0% on all ranges except ±1 V and ±10 V
Input Coupling (nom)	software programmable	AC/DC	AC/DC
Offset error at full speed (spec)	after warm-up and calibration	< 0.1% of range	< 0.1% of range
Gain error at full speed (spec)	after warm-up and calibration	< 1.0% of reading	< 1.0% of reading
Offset temperature drift (meas)	after warm-up and calibration	typical 5 ppm/K of range	typical 5 ppm/K of range
Gain temperature drift (meas)	after warm-up and calibration	typical 45 ppm/K of reading	typical 45 ppm/K of reading
Over voltage protection (nom)	range ≤ ±1V	2 Vrms	±5 V (1 MΩ), 5 Vrms (50 Ω)
Over voltage protection (nom)	range ≥ ±2V	6 Vrms	±30 V (1 MΩ), 5 Vrms (50 Ω)
Max DC voltage if AC coupling active (nom)		±30 V	±30 V
Relative input stage delay (meas)		Bandwidth filter disabled: 0 ns Bandwidth filter enabled: 14.7 ns	Bandwidth filter disabled: 3.8 ns Bandwidth filter enabled: 18.5 ns
Crosstalk 1 MHz sine signal (meas)	range ±1V	≤96 dB	≤93 dB
Crosstalk 20 MHz sine signal (meas)	range ±1V	≤82 dB	≤82 dB
Crosstalk 1 MHz sine signal (meas)	range ±5V	≤97 dB	≤85 dB
Crosstalk 20 MHz sine signal (meas)	range ±5V	≤82 dB	≤82 dB
Calibration	Internal	Self-calibration is done on software command and corrects against the onboard references. Self-calibration should be issued after warm-up time.	
Calibration	External	External calibration calibrates the on-board references used in self-calibration. All calibration constants are stored in nonvolatile memory. Optional ISO/IEC17025-compliant certificate. A yearly external calibration is recommended.	

	M4i.441x M4x.441x DN2.441-xx DN6.441-xx	M4i.442x M4x.442x DN2.442-xx DN6.442-xx DN2.822-xx	M4i.445x M4x.445x DN2.445-xx DN6.445-xx DN2.825-xx	M4i.447x M4x.447x DN2.447-xx DN6.447-xx DN2.827-xx	M4i.448x M4x.448x DN2.448-xx DN6.448-xx DN2.828-xx
lower bandwidth limit, DC coupling (nom)	0 Hz	0 Hz	0 Hz	0 Hz	0 Hz
lower bandwidth limit, AC coupled, 50 Ω (meas)	< 30 kHz	< 30 kHz	< 30 kHz	< 30 kHz	< 30 kHz
lower bandwidth limit, AC coupled, 1 MΩ (meas)	< 2 Hz	< 2 Hz	< 2 Hz	< 2 Hz	< 2 Hz
-3 dB bandwidth HF path, AC coupled, 50 Ω (typ)	65 MHz	125 MHz	250 MHz	125 MHz	250 MHz
Flatness within ±0.5 dB, HF path, AC coupled, 50 Ω (meas)	40 MHz	80 MHz	160 MHz	80 MHz	160 MHz
-3 dB bandwidth Buffered path, DC coupled, 1 MΩ (typ)	50 MHz	85 MHz	85 MHz (V1.1) 125 MHz (V1.2)	85 MHz	125 MHz (V1.2)
-3 dB bandwidth, bandwidth filter enabled (typ)	20 MHz	20 MHz	20 MHz	20 MHz	20 MHz

Trigger

Available trigger modes	software programmable	Channel Trigger, External, Software, Window, Re-Arm, Or/And, Delay, PXI (M4x only)
Channel trigger level resolution (nom)	software programmable	14 bit
Trigger engines		1 engine per channel with two individual levels, 2 external triggers
Trigger edge	software programmable	Rising edge, falling edge or both edges
Trigger delay	software programmable	0 to (8 GiSamples - 16) = 8589934576 Samples in steps of 16 samples
Multi, Gate, ABA: re-arming time (meas)		40 samples (+ programmed pretrigger)
Pretrigger at Multi, ABA, Gate, FIFO, Boxcar	software programmable	16 up to [8192 Samples in steps of 16]
Posttrigger	software programmable	16 up to 8Gi samples in steps of 16 (defining pretrigger in standard scope mode)
Memory depth	software programmable	32 up to [installed memory / number of active channels] samples in steps of 16

Trigger edge	software programmable	Rising edge, falling edge or both edges
Multiple Recording/ABA segment size, Boxcar	software programmable	32 up to [installed memory / 2 / active channels] samples in steps of 16
Trigger accuracy (all sources)		1 sample
Boxcar (high-resolution) average factor	software programmable	2, 4, 8, 16, 32, 64, 128 or 256
Timestamp modes	software programmable	Standard, Startreset, external reference clock on X0 (e.g. PPS from GPS, IRIG-B)
Data format		Std., Startreset: 64 bit counter, increments with sample clock (reset manually or on start)
		RefClock: 24 bit upper counter (increment with RefClock)
		40 bit lower counter (increments with sample clock, reset with RefClock)
Extra data	software programmable	none, acquisition of X0/X1/X2 inputs at trigger time, trigger source (for OR trigger)
Size per stamp		128 bit = 16 bytes
External trigger		Ext0
External trigger impedance (typ)	software programmable	50 Ω / 1 kΩ
External trigger coupling (nom)	software programmable	AC or DC
External trigger type		Window comparator
External input level (nom)		±10 V (1 kΩ), ±2.5 V (50 Ω),
External trigger sensitivity, min signal swing (nom)		2.5% of full scale range
External trigger level (nom)	software programmable	±10 V in steps of 10 mV
External trigger maximum voltage (nom)		±30V
External trigger bandwidth DC (typ)	50 Ω	DC to 200 MHz
	1 kΩ	DC to 150 MHz
External trigger bandwidth AC (typ)	50 Ω	20 kHz to 200 MHz
Minimum external trigger pulse width		≥ 2 samples
		Ext1
		1 kΩ
		fixed DC
		Single level comparator
		±10 V
		2.5% of full scale range = 0.5 V
		±10 V in steps of 10 mV
		±30 V
		n.a.
		DC to 200 MHz
		n.a.
		≥ 2 samples

Clock

Clock Modes	software programmable	internal PLL, external reference clock, Star-Hub sync (digitizerNETBOX and M4i only), PXI Reference Clock (M4x only)
Internal clock accuracy (spec)		≤ ±5 ppm
Internal clock setup granularity	standard clock mode	divider: maximum sampling rate divided by: 1, 2, 4, 8, 16, ... up to 131072 (full gain accuracy)
Internal clock setup granularity (nom)	special clock mode only	1 Hz (reduced gain accuracy when using special clock mode), only available for single cards (no star-hub), for digitizerNETBOX only available for models with one internal digitizer.
Clock setup range gaps (nom)	special clock mode only	un-setable clock speeds: 17.5 MHz to 17.9 MHz, 35.1 MHz to 35.8 MHz, 70 MHz to 72 MHz, 140 MHz to 144 MHz, 281 MHz to 287 MHz
External reference clock range (nom)	software programmable	≥ 10 MHz and ≤ 1 GHz
External reference clock input impedance (typ)		50 Ω fixed
External reference clock input coupling (nom)		AC coupling
External reference clock input edge		Rising edge
External reference clock input type		Single-ended, sine wave or square wave
External reference clock input swing (nom)	square wave	0.3 V peak-peak up to 3.0 V peak-peak
External reference clock input swing (nom)	sine wave	1.0 V peak-peak up to 3.0 V peak-peak
External reference clock input max DC voltage (nom)		±30 V (with max 3.0 V difference between low and high level)
External reference clock input duty cycle (nom)		45% to 55%
Internal ADC clock output type		Single-ended, 3.3V LVPECL
Internal ADC clock output frequency	standard clock mode	Fixed to maximum sampling rate/2 (250 MS/s, 200 MS/s, 125 MS/s, ...)
Internal ADC clock output frequency	special clock mode	445x, 825 models (500 MS/s): ADC clock/2 in the range between 40 MS/s and 250 MS/s 448x, 828 models (400 MS/s): ADC clock/2 in the range between 20 MS/s and 120 MS/s 442x, 822 models (250 MS/s): ADC clock/2 in the range between 20 MS/s and 120 MS/s 447x, 827 models (180 MS/s): ADC clock/2 in the range between 20 MS/s and 90 MS/s 441x models (130 MS/s): ADC clock/2 in the range between 20 MS/s and 65 MS/s
Star-Hub synchronization clock modes	software selectable	Standard clock mode with internal reference (maximum clock + divider), Standard clock mode with external reference (maximum clock + divider) special clock mode not allowed, except: 445 series (500 MS/s) can also run with 400 MS/s and divided clock for synchronization 442 series (250 MS/s) can also run with 180 MS/s and divided clock for synchronization
ABA mode clock divider for slow clock	software programmable	16 up to (128Ki - 16) in steps of 16
Channel to channel skew on one card (typ)		< 60 ps (typical)
Skew between star-hub synchronized cards (typ)		< 130 ps (typical, preliminary)

	M4i.441x M4x.441x DN2.441-xx DN6.441-xx	M4i.442x M4x.442x DN2.442-xx DN6.442-xx DN2.822-xx	M4i.445x M4x.445x DN2.445-xx DN6.445-xx DN2.825-xx	M4i.447x M4x.447x DN2.447-xx DN6.447-xx DN2.827-xx	M4i.448x M4x.448x DN2.448-xx DN6.448-xx DN2.828-xx
ADC Resolution	16 bit	16 bit	14 bit	16 bit	14 bit
max sampling clock	130 MS/s	250 MS/s	500 MS/s	180 MS/s	400 MS/s
min sampling clock (standard clock mode)	3.814 kS/s	3.814 kS/s	3.814 kS/s	3.814 kS/s	3.814 kS/s
min sampling clock (special clock mode)	0.610 kS/s	0.610 kS/s	0.610 kS/s	0.610 kS/s	0.610 kS/s

Block Average Signal Processing Option M4i.44xx/M4x.44xx/DN2.44x/DN6.44x/DN2.82x Series

		Firmware ≥ V1.14 (since August 2015)	Firmware < V1.14
Minimum Waveform Length		32 samples	32 samples
Minimum Waveform Stepsize		16 samples	16 samples
Maximum Waveform Length	1 channel active	128 KiSamples	32 KiSamples
Maximum Waveform Length	2 channels active	64 KiSamples	16 KiSamples
Maximum Waveform Length	4 or more channels active	32 KiSamples	8 KiSamples
Minimum Number of Averages		2	2
Maximum Number of Averages		65536 (64Ki)	65536 (64Ki)
Data Output Format	fixed	32 bit signed integer	32 bit signed integer
Re-Arming Time between waveforms (meas)		40 samples (+ programmed pretrigger)	40 samples (+ programmed pretrigger)
Re-Arming Time between end of average to start of next average (meas)		Depending on programmed segment length, max 100 µs	40 samples (+ programmed pretrigger)

Block Statistics Signal Processing Option M4i.44xx/M4x.44xx/DN2.44x/DN6.44x/DN2.82x Series

Minimum Waveform Length		32 samples
Minimum Waveform Stepsize		16 samples
Maximum Waveform Length	Standard Acquisition	2 GiSamples / channels
Maximum Waveform Length	FIFO Acquisition	2 GiSamples
Data Output Format	fixed	32 bytes statistics summary
Statistics Information Set per Waveform		Average, Minimum, Maximum, Position Minimum, Position Maximum, Trigger Timestamp
Re-Arming Time between Segments (meas)		40 samples (+ programmed pretrigger)

Multi Purpose I/O lines (front-plate)

Number of multi purpose lines		three, named X0, X1, X2
Input: available signal types	software programmable	Asynchronous Digital-In, Synchronous Digital-In, Timestamp Reference Clock
Input: impedance (nom)		10 kΩ to 3.3 V
Input: maximum voltage level (nom)		-0.5 V to +4.0 V
Input: signal levels (nom)		3.3 V LVTTTL (Low ≤ 0.8 V, High ≥ 2.0 V)
Input: bandwidth (nom)		125 MHz
Output: available signal types	software programmable	Asynchronous Digital-Out, Trigger Output, Run, Arm, PLL Refclock, System Clock
Output: impedance (nom)		50 Ω
Output: signal levels (nom)		3.3 V LVTTTL
Output: type (nom)		3.3 V LVTTTL, TTL compatible for high impedance loads
Output: drive strength (nom)		Capable of driving 50 Ω loads, maximum drive strength ±48 mA
Output: update rate (nom)	14/16 bit ADC resolution	sampling clock
Output: update rate (nom)	7/8 bit ADC resolution	Current sampling clock ≤ 1.25 GS/s : sampling clock Current sampling clock > 1.25 GS/s and ≤ 2.50 GS/s : ½ sampling clock Current sampling clock > 2.50 GS/s and ≤ 5.00 GS/s : ¼ sampling clock

Option M4i.xxxx-PulseGen

Number of internal pulse generators	4
Number of pulse generator output lines	3 (Existing multi-purpose outputs X0 to X2)
Time resolution of pulse generator	Pulse generator's sampling rate is derived from instrument's sampling rate and value can be read out. Maximum possible pulse generator update rate is 22xx: 156.25 MS/s (6.4 ns) 23xx: 156.25 MS/s (6.4 ns) 44xx: 125.00 MS/s (8.0 ns) 66xx: 156.25 MS/s (6.4 ns) 96xx: 156.25 MS/s (6.4 ns)
Programmable output modes	Single-shot, multiple repetitions on trigger, gated
Programmable trigger sources	Software, Card Trigger, Other Pulse Generator, XIO lines.
Programmable trigger gate	None, ARM state, RUN state
Programmable length (frequency)	2 to 4Gi samples in steps of 1 (32 bit)
Programmable width (duty cycle)	1 to 4Gi samples in steps of 1 (32 bit)
Programmable delay	0 to 4Gi samples in steps of 1 (32 bit)
Programmable loops	0 to 4Gi samples in steps of 1 (32 bit) with 0 = infinite loops
Output level of digital pulse generators	Please see section of multi-purpose I/O lines.


Frequency Response Plots

Frequency Response M4i.445x, M4x.445x, DN2.445-xx, DN6.445-xx and DN2.825-xx (meas)

Sampling Rate 500 MS/s

HF Path 50 Ω , AC coupling, no filter

Buffered Path 1 M Ω , AC Coupling, no filter

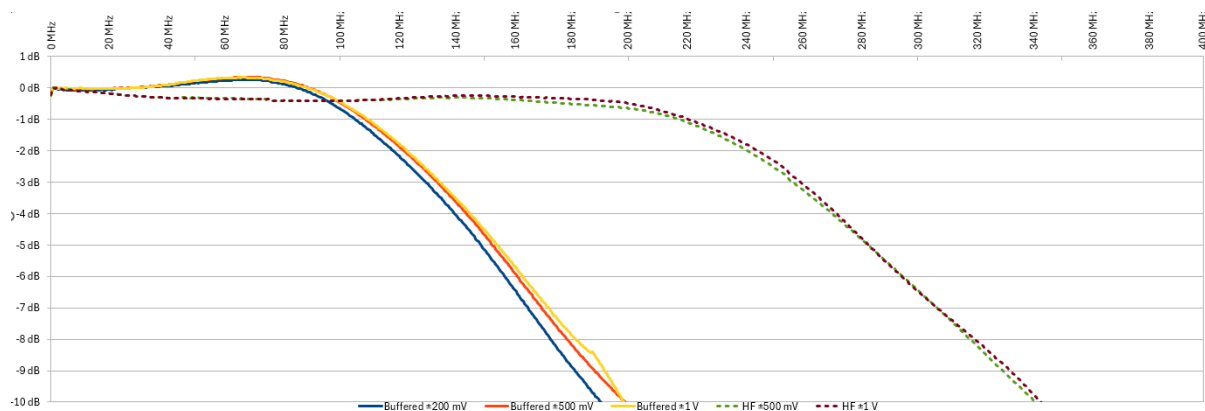


Frequency Response M4i.442x, M4x.442x, DN2.442-xx, DN6.442-xx and DN2.822-xx (meas)

Sampling Rate 250 MS/s

HF Path 50 Ω , AC coupling, no filter

Buffered Path 1 M Ω , AC Coupling, no filter

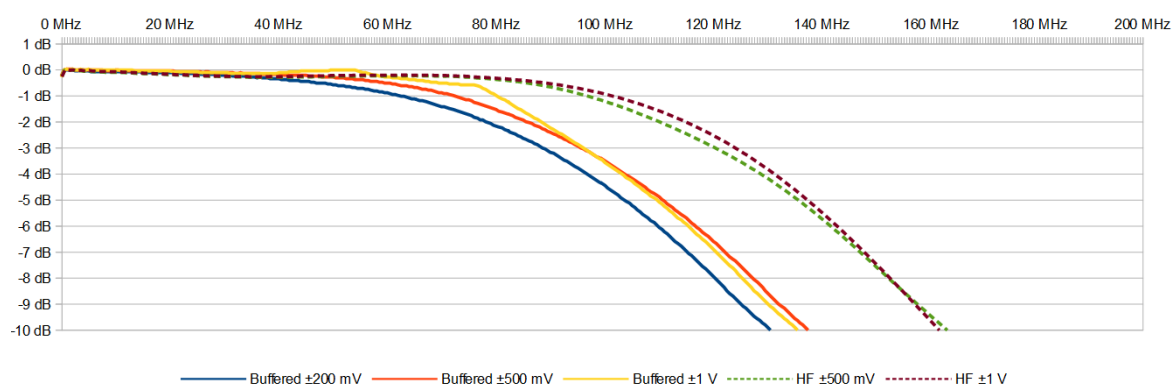


Frequency Response M4i.441x, M4x.441x, DN2.441-xx and DN6.441-xx (meas)

Sampling Rate 130 MS/s

HF Path 50 Ω , AC coupling, no filter

Buffered Path 1 M Ω , AC Coupling, no filter

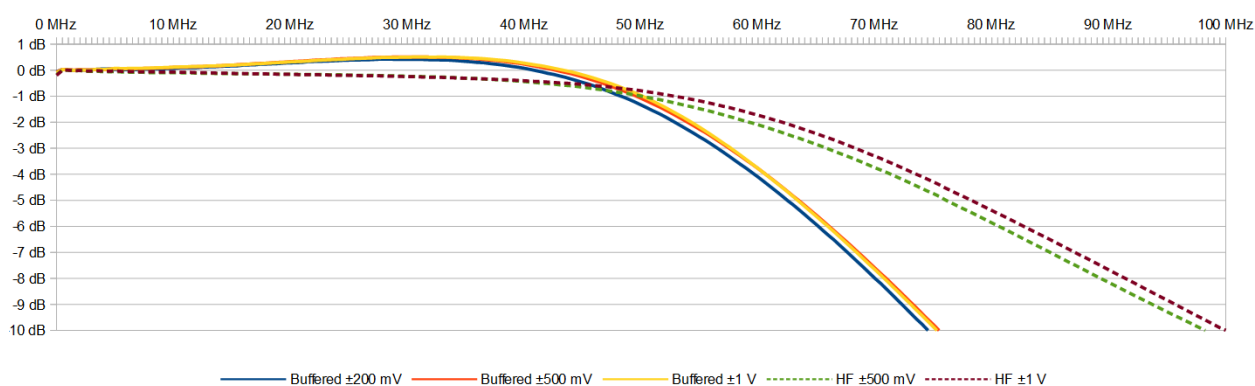

RMS Noise Level (Zero Noise), typical figures

M4i.445x, M4x.445x, DN2.445-xx, DN6.445-xx and DN2.825-xx, 14 Bit 500 MS/s M4i.448x, M4x.448x, DN2.448-xx, DN6.448-xx and DN2.828-xx, 14 Bit 400 MS/s							
Input Range	±200 mV	±500 mV	±1 V	±2 V	±2.5 V	±5 V	±10 V
Voltage resolution	24.4 µV	61.0 µV	122.1 µV	244.1 µV	305.2 µV	610.4 µV	1.22 mV
HF path, DC, fixed 50 Ω (typ)		<1.9 LSB <116 µV	<1.9 LSB <232 µV		<1.9 LSB <580 µV	<1.9 LSB <1.16 mV	
Buffered path, full BW (typ)	<3.8 LSB <93 µV	<2.7 LSB <165 µV	<2.1 LSB <256 µV	<3.8 LSB <928 µV		<2.7 LSB <1.65 mV	<2.0 LSB <2.44 mV
Buffered path, BW limit (typ)	<2.2 LSB <54 µV	<2.0 LSB <122 µV	<2.0 LSB <244 µV	<3.2 LSB <781 µV		<2.3 LSB <1.40 mV	<2.0 LSB <2.44 mV

M4i.442x, M4x.442x, DN2.442-xx, DN6.442-xx and DN2.822-xx, 16 Bit 250 MS/s M4i.447x, M4x.447x, DN2.447-xx, DN6.447-xx and DN2.827-xx, 16 Bit 180 MS/s							
Input Range	±200 mV	±500 mV	±1 V	±2 V	±2.5 V	±5 V	±10 V
Voltage resolution	6.1 µV	15.3 µV	30.5 µV	61.0 µV		152.6 µV	305.2 µV
HF path, DC, fixed 50 Ω (typ)		<6.9 LSB <105 µV	<6.9 LSB <211 µV		<6.9 LSB <526 µV	<6.9 LSB <1.05 mV	
Buffered path, full BW (typ)	<11 LSB <67 µV	<7.8 LSB <119 µV	<7.1 LSB <217 µV	<12 LSB <732 µV		<8.1 LSB <1.24 mV	<7.1 LSB <2.17 mV
Buffered path, BW limit (typ)	<7.9 LSB <48 µV	<7.0 LSB <107 µV	<6.9 LSB <211 µV	<9.8 LSB <598 µV		<7.2 LSB <1.10 mV	<7.1 LSB <2.17 mV

M4i.441x, M4x.441x, DN2.441-xx and DN6.441-xx, 16 Bit 130 MS/s							
Input Range	±200 mV	±500 mV	±1 V	±2 V	±2.5 V	±5 V	±10 V
Voltage resolution (1)	6.1 µV	15.3 µV	30.5 µV	61.0 µV	76.3 µV	152.6 µV	305.2 µV
HF path, DC, fixed 50 Ω (typ)		<5.9 LSB <90 µV	<5.9 LSB <180 µV		<5.9 LSB <450 µV	<5.9 LSB <900 µV	
Buffered path, full BW (typ)	<8.5 LSB <52 µV	<6.5 LSB <99 µV	<5.9 LSB <180 µV	<11 LSB <671 µV		<7.0 LSB <1.07 mV	<6.1 LSB <1.86 mV
Buffered path, BW limit (typ)	<7.0 LSB <43 µV	<6.1 LSB <93 µV	<5.9 LSB <180 µV	<9.6 LSB <586 µV		<6.7 LSB <1.02 mV	<6.1 LSB <1.86 mV

Dynamic Parameters

M4i.445x, M4x.445x, DN2.445-xx, DN6.445-xx and DN2.825-xx, 14 Bit 500 MS/s M4i.448x, M4x.448x, DN2.448-xx, DN6.448-xx and DN2.828-xx, 14 Bit 400 MS/s										
Input Path	HF path, AC coupled, fixed 50 Ohm						Buffered path, BW limit			Buffered path, full BW
Test signal frequency	10 MHz			40 MHz	70 MHz		10 MHz			40 MHz 70 MHz
Input Range	±500mV	±1V	±2.5V	±5V	±1V	±1V	±200mV	±500mV	±1V	±500mV ±500mV ±500mV
THD (typ)	<75.9 dB	<75.8 dB	<75.2 dB	<74.8 dB	<72.5 dB	<67.4 dB	<71.4 dB	<72.1 dB	<68.6 dB	<65.0 dB <58.6 dB <54.4 dB
SNR (typ)	>67.8 dB	>67.9 dB	>68.0 dB	>68.0 dB	>69.5 dB	>67.5 dB	>67.5 dB	>68.0 dB	>68.1 dB	>67.3 dB >65.8 dB >65.6 dB
SFDR excl. harmonics (typ)	>88.1 dB	>88.6 dB	>85.2 dB	>85.3 dB	>88.0 dB	>87.8 dB	>87.3 dB	>88.4 dB	>87.5 dB	>89.0 dB >88.9 dB >88.8 dB
SFDR incl. harmonics (typ)	>80.1 dB	>80.0 dB	>77.4 dB	>77.3 dB	>74.0 dB	>69.9 dB	>78.1 dB	>73.5 dB	>69.8 dB	>67.5 dB >60.8 dB >56.0 dB
SINAD/THD+N (typ)	>67.2 dB	>67.2 dB	>67.2 dB	>67.2 dB	>67.7 dB	>64.4 dB	>66.5 dB	>66.6 dB	>65.3 dB	>63.9 dB >57.9 dB >54.0 dB
ENOB based on SINAD (typ)	>10.9 bit	>10.9 bit	>10.9 bit	>10.9 bit	>10.9 bit	>10.4 bit	>10.7 bit	>10.8 bit	>10.6 bit	>10.3 bit >9.3 bit >8.7 bit
ENOB based on SNR (typ)	>11.0 bit	>11.0 bit	>11.0 bit	>11.0 bit	>11.0 bit	>10.9 bit	>10.9 bit	>11.0 bit	>11.0 bit	>10.9 bit >10.6 bit >10.6 bit

M4i.442x, M4x.442x, DN2.442-xx, DN6.442-xx and DN2.822-xx, 16 Bit 250 MS/s M4i.447x, M4x.447x, DN2.447-xx, DN6.447-xx and DN2.827-xx, 16 Bit 180 MS/s										
Input Path	HF path, AC coupled, fixed 50 Ohm						Buffered path, BW limit			Buffered path, full BW
Test signal frequency	10 MHz			40 MHz			10 MHz			10 MHz 40 MHz
Input Range	±1V	±500mV	±1V	±2.5V	±5V	±1V	±200mV	±500mV	±1V	±500mV ±500mV ±500mV
THD (typ)	<73.1 dB	<74.0 dB	<74.1 dB	<74.1 dB	<74.1 dB	<62.9 dB	<73.2 dB	<71.5 dB	<69.0 dB	<72.2 dB <67.5 dB <49.8 dB
SNR (typ)	>71.9 dB	>71.5 dB	>71.5 dB	>71.6 dB	>71.6 dB	>71.8 dB	>69.8 dB	>71.0 dB	>71.2 dB	>71.7 dB >71.0 dB >69.0 dB
SFDR excl. harmonics (typ)	>92.1 dB	>90.4 dB	>90.8 dB	>90.1 dB	>89.7 dB	>90.2 dB	>92.1 dB	>92.0 dB	>92.1 dB	>90.0 dB >91.4 dB >92.5 dB
SFDR incl. harmonics (typ)	>74.4 dB	>75.4 dB	>75.5 dB	>75.5 dB	>75.5 dB	>64.5 dB	>75.0 dB	>73.1 dB	>69.8 dB	>74.7 dB >67.8 dB >50.0 dB
SINAD/THD+N (typ)	>69.8 dB	>69.6 dB	>69.6 dB	>69.6 dB	>69.6 dB	>62.2 dB	>68.5 dB	>68.2 dB	>67.0 dB	>68.8 dB >66.4 dB >48.9 dB
ENOB based on SINAD (typ)	>11.3 bit	>11.2 bit	>11.2 bit	>11.3 bit	>11.3 bit	>10.0 bit	>11.1 bit	>11.0 bit	>10.8 bit	>11.1 dB >10.7 bit >7.8 bit
ENOB based on SNR (typ)	>11.7 bit	>11.6 bit	>11.6 bit	>11.6 bit	>11.6 bit	>11.6 bit	>11.3 bit	>11.5 bit	>11.5 bit	>11.6 dB >11.5 bit >11.2 bit


M4i.441x, M4x.441x, DN2.441-xx and DN6.441-xx, 16 Bit 130 MS/s										
Input Path	HF path, AC coupled, fixed 50 Ohm						Buffered path, BW limit			Buffered path, full BW
Test signal frequency	10 MHz						10 MHz			10 MHz 10 MHz
Input Range	±1V	±500mV	±1V	±2.5V	±5V		±200mV	±500mV	±1V	±500mV ±500mV
THD (typ)	<72.6 dB	<77.8 dB	<77.5 dB	<77.3 dB	<77.1 dB		<74.5 dB	<73.9 dB	<70.1 dB	<73.5 dB <73.4 dB
SNR (typ)	>72.2 dB	>71.8 dB	>71.9 dB	>72.0 dB	>72.0 dB		>69.8 dB	>71.2 dB	>71.3 dB	>71.1 dB >71.0 dB
SFDR excl. harmonics (typ)	>92.4 dB	>97.0 dB	>96.0 dB	>95.2 dB	>94.8 dB		>89.0 dB	>94.0 dB	>94.5 dB	>88.8 dB >93.5 dB
SFDR incl. harmonics (typ)	>73.7 dB	>78.6 dB	>78.2 dB	>75.2 dB	>75.1 dB		>77.6 dB	>77.8 dB	>71.5 dB	>74.7 dB >73.1 dB
SINAD/THD+N (typ)	>69.4 dB	>70.8 dB	>70.8 dB	>70.9 dB	>70.8 dB		>69.0 dB	>69.7 dB	>68.2 dB	>69.2 dB >69.2 dB
ENOB based on SINAD (typ)	>11.2 bit	>11.5 bit	>11.5 bit	>11.5 bit	>11.5 bit		>11.2 bit	>11.3 bit	>11.0 bit	>11.2 bit >11.2 bit
ENOB based on SNR (typ)	>11.7 bit	>11.6 bit	>11.6 bit	>11.6 bit	>11.6 bit		>11.3 bit	>11.5 bit	>11.5 bit	>11.6 bit >11.6 bit

Dynamic parameters are measured at ±1 V input range (if no other range is stated) and 50 Ω termination with the samplerate specified in the table. Measured parameters are averaged 20 times to get typical values. Test signal is a pure sine wave generated by a signal generator and a matching bandpass filter. Amplitude is >99% of FSR. SNR and RMS noise parameters may differ depending on the quality of the used PC. SNR = Signal to Noise Ratio, THD = Total Harmonic Distortion, SFDR = Spurious Free Dynamic Range, SINAD = Signal Noise and Distortion, ENOB = Effective Number of Bits.


Noise Floor Plots (open inputs)

Buffered Path
1 MΩ, AC
±1 V range
(meas)


M4i.445x, M4x.445x,
DN2.445-xx, DN6.445-xx, DN2.825-xx
Sampling Rate 500 MS/s

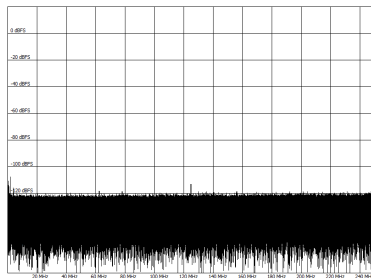




M4i.442x, M4x.442x,
DN2.442-xx, DN6.442-xx, DN2.822-xx
Sampling Rate 250 MS/s

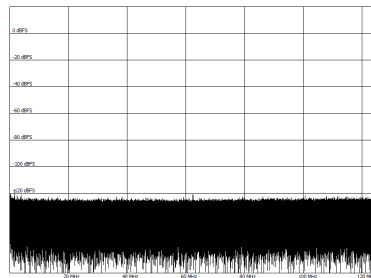

M4i.441x, M4x.441x,
DN2.441-xx, DN6.441-xx
Sampling Rate 130 MS/s

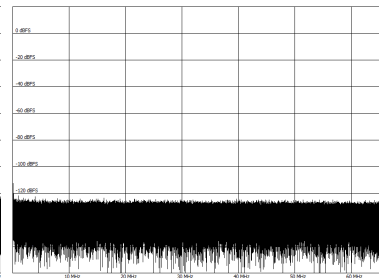

HF Path
50 Ω, AC
±500 mV
(meas)

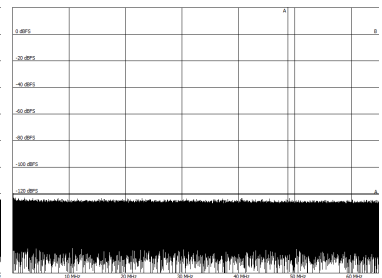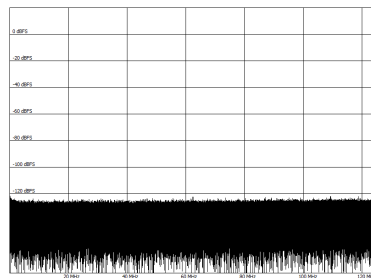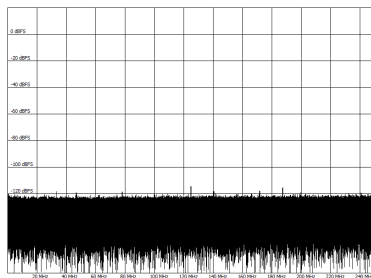

Option M4i.44xx-DigSMA

Number of additional multi purpose I/O lines
Card width with installed option
Connectors on additional secondary bracket
Input: signal levels (nom)
Input: impedance (nom)
Input: maximum voltage level (nom)
Input: maximum bandwidth (nom)
Input: available signal types
Output: available signal types

software programmable

8 (X3 to X10)
Requires one additional slot left of the main card's bracket, on „solder side“ of the PCIe card
8 x SMA female
3.3 V LVTTTL (Low ≤ 0.8 V, High ≥ 2.0 V)
10 kΩ to 3.3 V
-0.5 V to +4.0 V
125 MHz
Synchronous Digital-In, Asynchronous Digital-In
none, option 44xx-DigSMA provides additional inputs only

Connectors

Analog Inputs/Analog Outputs
Trigger 0 Input
Clock Input
Trigger 1 Input
Clock Output
Multi Purpose I/O

SMA female (one for each single-ended input)
SMA female
SMA female
MMCX female
MMCX female
MMCX female (3 lines)

Cable-Type: Cab-3mA-xx-xx
Cable-Type: Cab-3mA-xx-xx
Cable-Type: Cab-3mA-xx-xx
Cable-Type: Cab-1m-xx-xx
Cable-Type: Cab-1m-xx-xx
Cable-Type: Cab-1m-xx-xx

Connection Cycles

All connectors have an expected lifetime as specified below. Please avoid to exceed the specified connection cycles or use connector savers.

SMA connector	500 connection cycles
MMCX connector	500 connection cycles
PCIe connector	50 connection cycles
PCIe power connector	30 connection cycles

Environmental and Physical Details

Dimension (Single Card)		L x H x W: 241 mm (¾ PCIe length) x 107 mm x 20 mm (single slot width)
Dimension (Card with option SH8tm installed)		241 mm (¾ PCIe length) x 107 mm x 40 mm (double slot width, extends W by 1 slot right of the main card's bracket, on „component side“ of the PCIe card.)
Dimension (Card with option SH8ex installed)		Extends L to 312 mm (full PCIe length) x 107 mm x 20 mm (single slot width)
Dimension (Card with option M4i.44xx-DigSMA installed)		241 mm (¾ PCIe length) x 107 mm x 40 mm (double slot width, extends W by 1 slot left of the main card's bracket, on „solder side“ of the PCIe card.)
Weight (M4i.44xx series)	maximum	290 g
Weight (M4i.22xx, M4i.23xx, M4i.66xx, M4i.77xx, M4i.96xx series)	maximum	420 g
Weight (Option star-hub -sh8ex, -sh8tm)	including 8 sync cables	130 g
Weight (Option M4i.44xx-DigSMA)		320 g
Warm up time (meas)		30 minutes
Operating temperature (nom)		0°C to 50°C
Storage temperature (nom)		-10°C to 70°C
Humidity (nom)		10% to 90%
Dimension of packing	1 or 2 cards	470 mm x 250 mm x 130 cm
Volume weight of packing	1 or 2 cards	4 kg

PCI Express specific details

PCIe slot type		x8 Generation 2 (Gen2)
PCIe slot compatibility (physical)		x8/x16
PCIe slot compatibility (electrical)		x1, x2, x4, x8, x16 with PCIe Gen1, Gen2, Gen3, Gen4 or Gen5
Sustained streaming mode (meas): M4i.22xx, M4i.23xx, M4i.44xx, M4i.77xx	Card-to-System	> 3.4 GB/s (measured with a chipset supporting a TLP size of 256 bytes, using PCIe x8 Gen2)
Sustained streaming mode (meas): M4i.66xx, M4i.96xx	System-to-Card	> 2.8 GB/s (measured with a chipset supporting a TLP size of 256 bytes, using PCIe x8 Gen2)

Certification, Compliance, Warranty

Conformity Declaration	EN 17050-1:2010	General Requirements
EU Directives	2014/30/EU 2014/35/EU 2011/65/EU 2006/1907/EC 2012/19/EU	EMC - Electromagnetic Compatibility LVD - Electrical equipment designed for use within certain voltage limits RoHS - Restriction of the use of certain hazardous substances in electrical and electronic equipment REACH - Registration, Evaluation, Authorisation and Restriction of Chemicals WEEE - Waste from Electrical and Electronic Equipment
Compliance Standards	EN 61010-1: 2010 EN 61187:1994 EN 61326-1:2021 EN 61326-2-1:2021 EN IEC 63000:2018	Safety regulations for electrical measuring, control, regulating and laboratory devices - Part 1: General requirement Electrical and electronic measuring equipment - Documentation Electrical equipment for measurement, control and laboratory use EMC requirements - Part 1: General requirements EMC requirements - Part 2-1: Particular requirements - Test configurations, operational conditions and performance criteria for sensitive test and measurement equipment for EMC unprotected applications Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances
Product warranty	5 years starting with the day of delivery	
Software and firmware updates	Life-time, free of charge	


Power Consumption

	PCI EXPRESS		
	3.3V	12 V	Total
M4i.4410-x8, M4i.4420-x8, M4i.4470-x8 (meas)	0.2 A	2.2 A	27 W
M4i.4411-x8, M4i.4421-x8, M4i.4471-x8 (meas)	0.2 A	2.7 A	33 W
M4i.4450-x8, M4i.4480-x8 (meas)	0.2 A	2.2 A	27 W
M4i.4451-x8, M4i.4481-x8 (meas)	0.2 A	2.9 A	35 W

MTBF

MTBF (typ)	200000 hours
------------	--------------

Hardware block diagram

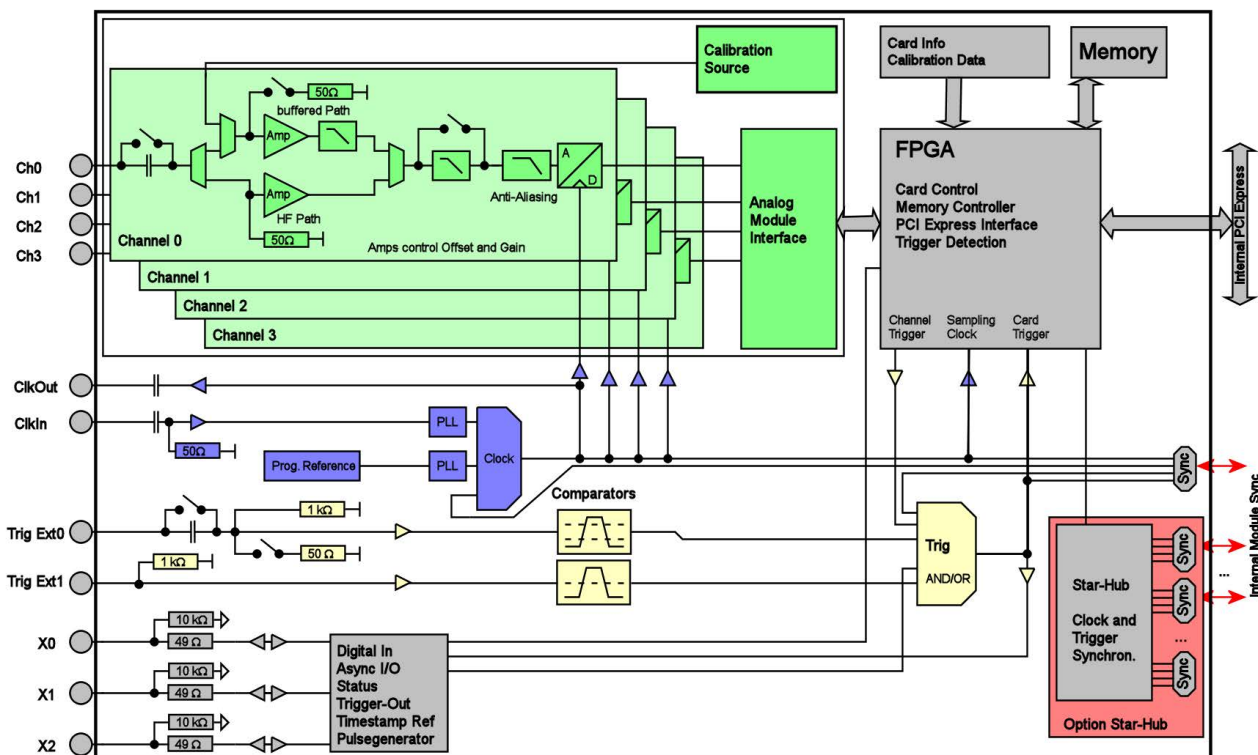

Order Information

The card is delivered with 2 GiSample on-board memory and supports standard acquisition (Scope), FIFO acquisition (streaming), Multiple Recording, Gated Sampling, Boxcar Average (High-Resolution), ABA mode and Timestamps. Operating system drivers for Windows/Linux 32 bit and 64 bit, examples for C/C++, LabVIEW (Windows), MATLAB (Windows and Linux), IVI, .NET, Delphi, Java, Python, Julia and a Base license of the oscilloscope software SBench 6 are included.

Adapter cables are not included. Please order separately!

PCI Express x8

	Order no.	A/D Resolution	Standard mem	1 channel	2 channels	4 channels	
Export Versions	M4i.4410-x8	16 Bit	2 GiSample	130 MS/s	130 MS/s		Discontinued
	M4i.4411-x8	16 Bit	2 GiSample	130 MS/s	130 MS/s	130 MS/s	Discontinued
	M4i.4420-x8	16 Bit	2 GiSample	250 MS/s	250 MS/s		
	M4i.4421-x8	16 Bit	2 GiSample	250 MS/s	250 MS/s	250 MS/s	
	M4i.4450-x8	14 Bit	2 GiSample	500 MS/s	500 MS/s		
	M4i.4451-x8	14 Bit	2 GiSample	500 MS/s	500 MS/s	500 MS/s	
	M4i.4470-x8	16 Bit	2 GiSample	180 MS/s	180 MS/s		
	M4i.4471-x8	16 Bit	2 GiSample	180 MS/s	180 MS/s	180 MS/s	
	M4i.4480-x8	14 Bit	2 GiSample	400 MS/s	400 MS/s		
	M4i.4481-x8	14 Bit	2 GiSample	400 MS/s	400 MS/s	400 MS/s	

Options

Order no.	Option
M4i.44xx-DigSMA ⁽¹⁾	8 additional synchronous digital inputs on SMA connectors on front-panel, needs separate slot bracket on back-side. Cannot be mounted in parallel with star-hub

Options

Order no.	Option
M4i.xxxx-SH8ex ⁽¹⁾	Synchronization Star-Hub for up to 8 cards (extension), only one slot width, extension of the card to full PCI Express length (312 mm). 8 synchronization cables included.
M4i.xxxx-SH8tm ⁽¹⁾	Synchronization Star-Hub for up to 8 cards (top mount), two slots width, top mounted on card. 8 synchronization cables included.
M4i-upgrade	Upgrade for M4i.xxxx: Later installation of option Star-Hub

Firmware Options

Order no.	Option
M4i.xxxx-spavg	Signal Processing Firmware Option: Block Average (later firmware-upgrade available)
M4i.xxxx-spstat	Signal Processing Firmware Option: Block Statistics/Peak Detect (later firmware-upgrade available)
M4i.xxxx-PulseGen	Firmware Option: adds 4 freely programmable digital pulse generators that use the XIO lines for output (later installation by firmware-upgrade available)

Services

Order no.	
Recal	Recalibration at Spectrum incl. calibration protocol
Card-Prot-17025	ISO 17025 Calibration Certificate for one card; add-on for new cards or for recalibration

Standard Cables

for Connections	Length	Order no.				
		to BNC male	to BNC female	to SMA male	to SMA female	to SMB female
Analog/Clock-In/Trig-In	80 cm	Cab-3mA-9m-80	Cab-3mA-9f-80	Cab-3mA-3mA-80		Cab-3f-3mA-80
Analog/Clock-In/Trig-In Probes (short)	200 cm	Cab-3mA-9m-200	Cab-3mA-9f-200	Cab-3mA-3mA-200		Cab-3f-3mA-200
Clk-Out/Trig-Out/Extra	5 cm		Cab-3mA-9f-5			
Clk-Out/Trig-Out/Extra	80 cm	Cab-1m-9m-80	Cab-1m-9f-80	Cab-1m-3mA-80	Cab-1m-3fA-80	Cab-1m-3f-80
Clk-Out/Trig-Out/Extra	200 cm	Cab-1m-9m-200	Cab-1m-9f-200	Cab-1m-3mA-200	Cab-1m-3fA-200	Cab-1m-3f-200
Information	The standard adapter cables are based on RG174 cables and have a nominal attenuation of 0.3 dB/m at 100 MHz and 0.5 dB/m at 250 MHz. For high speed signals we recommend the low loss cables series CHF					

Low Loss Cables

Order No.	Option
CHF-3mA-3mA-200	Low loss cables SMA male to SMA male 200 cm
CHF-3mA-9m-200	Low loss cables SMA male to BNC male 200 cm
Information	The low loss adapter cables are based on MF141 cables and have an attenuation of 0.3 dB/m at 500 MHz and 0.5 dB/m at 1.5 GHz. They are recommended for signal frequencies of 200 MHz and above.

Amplifiers

Order no.	Bandwidth	Connection	Input Impedance	Coupling	Amplification
SPA.1412 ⁽²⁾	200 MHz	BNC	1 MOhm	AC/DC	x10/x100 (20/40 dB)
SPA.1411 ⁽²⁾	200 MHz	BNC	50 Ohm	AC/DC	x10/x100 (20/40 dB)
SPA.1232 ⁽²⁾	10 MHz	BNC	1 MOhm	AC/DC	x100/x1000 (40/60 dB)
SPA.1231 ⁽²⁾	10 MHz	BNC	50 Ohm	AC/DC	x100/x1000 (40/60 dB)
Information	External Amplifiers with one channel, BNC/SMA female connections on input and output, manually adjustable offset, manually switchable settings. An external power supply for 100 to 240 VAC is included. Please be sure to order an adapter cable matching the amplifier connector type and matching the connector type for your A/D card input.				

Software SBench6

Order no.	
SBench6	Base version included in delivery. Supports standard mode for one card.
SBench6-Pro	Professional version for one card: FIFO mode, export/import, calculation functions, ...
SBench6-Multi	Option multiple cards: Needs SBench6-Pro. Handles multiple synchronized cards in one system.
Volume Licenses	Please ask Spectrum for details.

Software Options

Order no.	
SPc-RServer	Remote Server Software Package - LAN remote access for M2i/M3i/M4i/M4x/M2p/M5i cards
SPc-SCAPP	Spectrum's CUDA Access for Parallel Processing - SDK for direct data transfer between Spectrum card and CUDA GPU. Includes RDMA activation and examples. Only working for Data Acquisition or AWG mode, not usable for DDS mode

⁽¹⁾ : Just one of the options can be installed on a card at a time.

⁽²⁾ : Third party product with warranty differing from our export conditions. No volume rebate possible.

Technical changes and printing errors possible

SBench, digitizerNETBOX, generatorNETBOX and hybridNETBOX are registered trademarks of Spectrum Instrumentation GmbH. Microsoft, Visual C++, Windows, Windows 98, Windows NT, Window 2000, Windows XP, Windows Vista, Windows 7, Windows 8, Windows 10 and Windows 11 are trademarks/registered trademarks of Microsoft Corporation. LabVIEW, DASYLab, Diadem and LabWindows/CVI are trademarks/registered trademarks of National Instruments Corporation. MATLAB is a trademark/registered trademark of The Mathworks, Inc. Delphi and C++ Builder are trademarks/registered trademarks of Embarcadero Technologies, Inc. IVI is a registered trademark of the IVI Foundation. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Python is a trademark/registered trademark of Python Software Foundation. Julia is a trademark/registered trademark of Julia Computing, Inc. PCIe, PCI Express and PCI-X and PCI-SIG are trademarks of PCI-SIG. LXI is a registered trademark of the LXI Consortium. PICMG and CompactPCI are trademarks of the PCI Industrial Computation Manufacturers Group. Intel and Intel Core i3, Core i5, Core i7, Core i9 and Xeon are trademarks and/or registered trademarks of Intel Corporation. AMD, Opteron, Sempron, Phenom, FX, Ryzen and EPYC are trademarks and/or registered trademarks of Advanced Micro Devices. Arm is a trademark or registered trademark of Arm Limited (or its subsidiaries). NVIDIA, CUDA, GeForce, Quadro, Tesla and Jetson are trademarks/registered trademarks of NVIDIA Corporation.